


TS-1930 TIP SWITCH

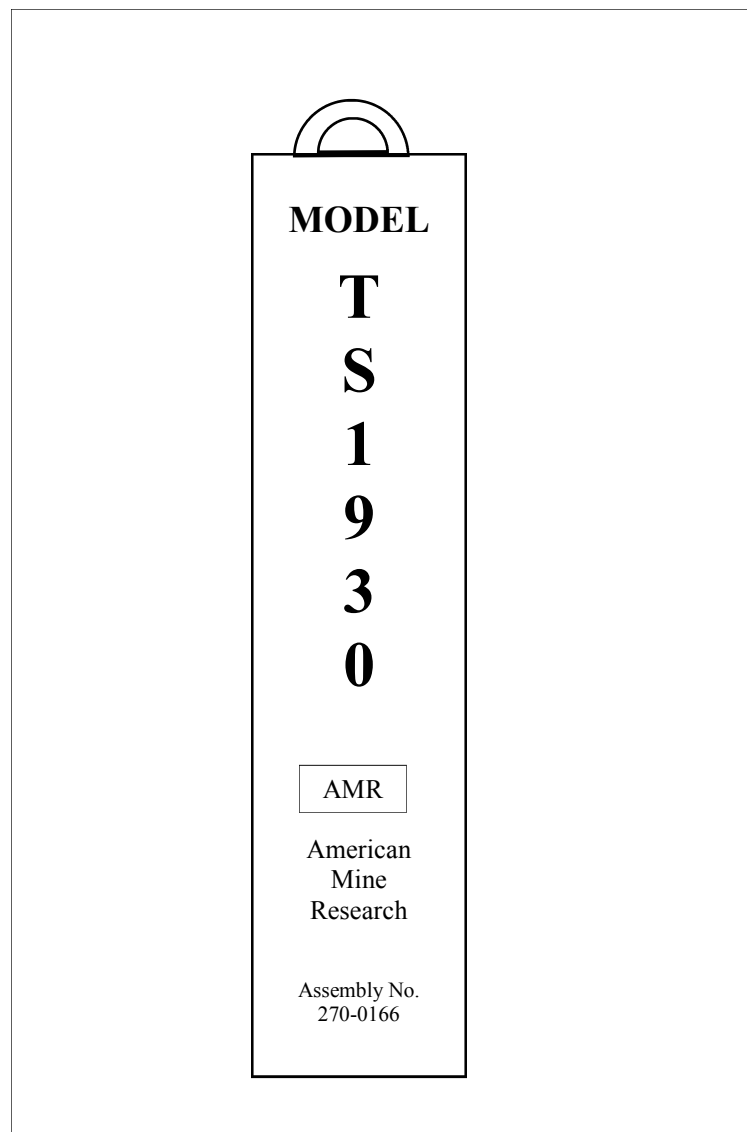

The AMR Tilt Switch is a simple yet versatile unit to sense material levels both underground and in surface operations. The TS-1930 is potted to increase its durability. It is designed to be hung vertically, using the attached eyehook. If it tilts more than 30 degrees in any direction, the normally closed mercury switch will open, breaking a control or sense circuit. The switch is rated for 120 VAC at 12.5 Amps

SPECIFICATIONS

- Switch - 120 VAC at 12.5Amps
- Dimensions - 7" H x 2.25" SQ.
- Weight - 2.5 lbs.

WIRING FOR NORMALLY CLOSED MODEL - TS-1930

- Green - Frame Ground
- Black - Switch Contact
- White - Switch Contact - Common

